


Cylindrical fuse-link

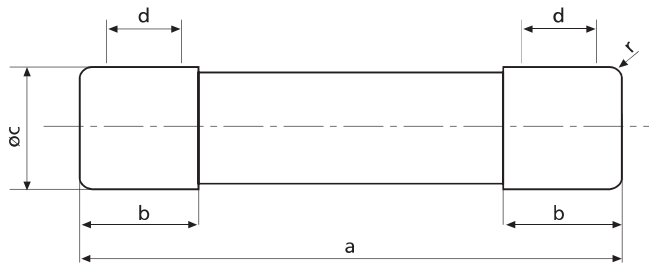

size	a	b _{max.}	c	d _{min.}	r
10 x 38	38,0±0,6	10,5	10,3±0,1	6	1,5±0,5
14 x 51	51,0±0,6/-1	13,8	14,3±0,1	7,5	±1
22 x 58	58,0±0,1	16,2	22,2±0,1	11	±1

Time current characteristics

I/t, gG
CH8

